




4090





Brida acodada

Material: Acero bonificado pintado.


DIN 6316

Ejemplo de pedido: ULM 4090-06

Referencia	l	b ₁	b ₂	b ₃	h	a	c	e ₁	e ₂	e ₃	r	FdaN	g
4090-06	60	7	20	10	20	10	8	20	20	14	11	482	80
4090-08	80	9	25	12	25	12	9	25	25	17	14	877	160
4090-10	100	11	30	15	30	15	12	32	32	22	18	1390	300
4090-12	125	14	40	20	40	20	16	40	40	28	20	2020	680
4090-16	125	18	50	25	50	25	20	49	40	38	25	3780	1050
4090-161	160	18	50	25	50	25	20	49	50	38	25	3780	1400
4090-20	160	22	60	30	60	30	24	55	55	40	28	5880	2000
4090-201	200	22	60	30	60	30	24	55	70	40	28	5880	2500
4090-24	200	26	70	35	70	40	28	72	60	54	34	8470	3400
4090-241	250	26	70	35	70	40	28	72	80	54	34	8470	4700

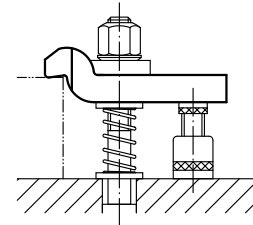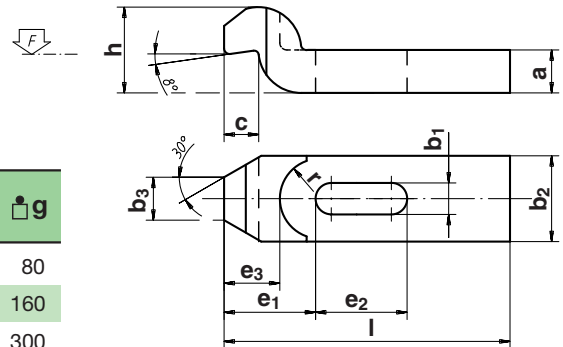

4110

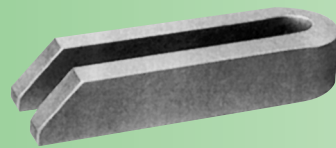

Brida abierta

Material: Acero bonificado pintado.

DIN 6315 B

Ejemplo de pedido: ULM 4110-06

Referencia	l ₁	a	b ₁	b ₂	b ₃	b ₄	g
4110-06	60	12	7	19	6	3	60
4110-08	80	15	9	25	8	4	140
4110-10	100	20	11	31	10	5	300
4110-12	125	25	14	38	12	6	570
4110-121	160	25	14	38	12	6	730
4110-122	200	25	14	38	12	6	910
4110-16	160	30	18	48	15	8	1080
4110-161	200	30	18	48	15	8	1360
4110-162	250	40	18	48	15	10	2250
4110-20	200	40	22	52	15	10	1800
4110-201	250	40	22	62	20	10	3000
4110-202	315	40	22	62	20	10	3850
4110-24	200	40	26	66	20	10	2400
4110-241	250	40	26	66	20	10	3000
4110-242	315	40	26	66	20	10	3850

